

Short-stroke cylinders Series QN

Single-acting, non magnetic \varnothing 8, 12, 20, 32, 50, 63



The Series QN short-stroke cylinders (single-acting) have been designed so that they can be installed in confined spaces. The standard strokes are indicated in the tables below. Due to the compactness and sturdiness of these cylinders, they are mainly suitable for positioning and locking.

GENERAL DATA

Type of construction	compact
Operation	single-acting
Materials	aluminium body - NBR seals - other: stainless steel and OT58
Operating pressure	P. min 2 bar P. max 10 bar
Operating temperature	0°C + 80°C (with dry air - 20°C)
Fluid	clean air, without lubrication ,If lubricated air is used, it is recommended to use oil ISO VG32. Once applied the lubrication should never be interrupted.
Bore	\varnothing 8, 12, 20, 32, 50, 63
Stroke	see table
Type of mounting	by means of holes in body

STANDARD STROKES FOR CYLINDERS SERIES QN


STANDARD STROKES				
∅	4	5	10	25
8	x			
12	x		x	
20	x		x	
32		x	x	x
50			x	x
63			x	x

CODING EXAMPLE

QN	1	A	50	A	25
-----------	----------	----------	-----------	----------	-----------

QN	SERIES
1	OPERATING 1 = single-acting
A	MATERIALS A = rolled stainless steel rod aluminium body
50	BORE 8 mm 12 mm 20 mm 32 mm 50 mm 63 mm
A	TYPE OF DESIGN A = standard
25	STROKE (see table)


Short-stroke cylinders Series QN

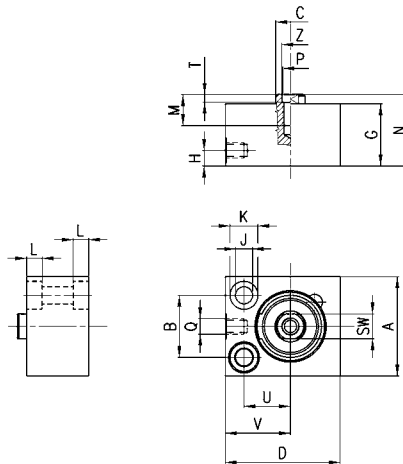

DIMENSIONS

Mod.	∅	A ^{h8}	B	∅C	D	E	F	G	H	∅J	∅K	L	M	N	P	Q ^{H13}	R	SW	T ^{+0,1}	U	V	Z ^{+0,10}
QN1A08A04	8	18	11	4	20	-	-	16	5	3,2	5,8	3	-	17	-	M5	-	-	-	8	13,5	-
QN1A12A04	12	20	13	5	25	-	-	16	5	3,2	5,8	3	-	17	-	M5	-	-	-	9	16	-
QN1A12A10	12	20	13	5	25	-	-	26	5	3,2	5,8	3	-	30	-	M5	-	-	-	9	16	-
QN1A20A04	20	32	20	10	37	-	-	20	5	5,5	9	5	8	21	M5	M5	-	8	2,5	15	21	5,5
QN1A20A10	20	32	20	10	37	-	-	32	5	5,5	9	5	8	33	M5	M5	-	8	2,5	15	21	5,5

Short - stroke cylinders Series QN

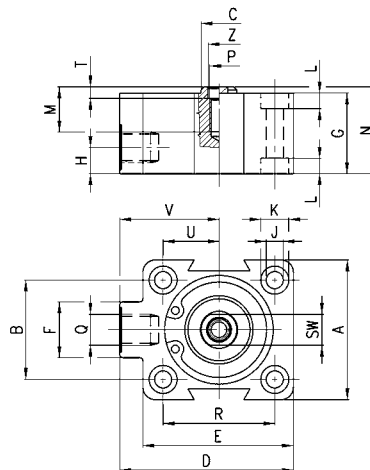

DIMENSIONS

Mod.	∅	A ^{h8}	B	∅C	D	E	F	G	H	∅J	∅K	L	M	N	P	Q ^{H13}	R	SW	T ^{+0,1}	U	V	Z ^{+0,10}
QN1A32A05	32	45	32	12	56	48,5	18	26	8,5	5,5	9	5	14,5	27	M6	G1/8	36	10	2,5	18	32	7
QN1A32A10	32	45	32	12	56	48,5	18	32	8,5	5,5	9	5	14,5	33	M6	G1/8	36	10	2,5	18	32	7
QN1A32A25	32	45	32	12	56	48,5	18	57,5	8,5	5,5	9	5	14,5	58,5	M6	G1/8	36	10	2,5	18	32	7
QN1A50A10	50	64	50	16	72	64	20	30	8,5	6,5	10,5	6,3	15,5	31	M8	G1/8	50	13	3,5	25	40	8,5
QN1A50A25	50	64	50	16	72	64	20	57,5	8,5	6,5	10,5	6,3	15,5	58,5	M8	G1/8	50	13	3,5	25	40	8,5
QN1A63A10	63	80	62	16	88	80	20	35	8,5	8,5	14	8,5	14,5	36	M8	G1/8	62	13	3,5	31	48	8,5
QN1A63A25	63	80	62	16	88	80	20	60,5	8,5	8,5	14	8,5	14,5	62,5	M8	G1/8	62	13	3,5	31	48	8,5